

Easy to maintain



- > Easy to remove & to renovate
- > No damage to subfloor
- > Easy to clean: Topclean XP™ PUR surface treatment



Define spaces



- > Create shop in shop corners and demo areas
- > Directional signage
- > Divide areas



Specification


Modular heterogeneous product with interlocking connection
Product standard:
ISO 10582 - EN 649.

CERTIFICATION & CLASSIFICATION	STANDARDS	TILT
Type of floorcovering	EN ISO 10582 - EN 649	Modular heterogeneous product with interlocking connection
CE certification	EN 14041	Yes
Classification	EN ISO 10874 - EN 685	Commercial: 34 Industrial: 43
TECHNICAL CHARACTERISTICS	STANDARDS	TILT
Total thickness	EN ISO 24346 - EN 428	5.0 mm
Wear layer thickness	EN ISO 24340 - EN 429	0.70 mm
Surface treatment (PUR)		Yes
Total weight/m²	EN ISO 23997 - EN 430	8 000 g
Abrasion group	EN 660-2	Group T: ≤ 2.00 mm³
Form of delivery	EN ISO 24342 - EN 427 Tiles	91.44 x 91.44 cm (Granite) 3 tiles/box (= 2.51 m² - 20.10 kg) 45.72 x 45.72 cm (Concrete) 10 tiles/box (= 2.09 m² - 16.70 kg)
TECHNICAL PERFORMANCES	STANDARDS	TILT
Dimensional stability	EN ISO 23999 - EN 434	< 0.15 %
Reaction to fire	EN 13501-1	B _{fl} s1 over concrete substrate
Residual indentation	EN ISO 24343-1 - EN 433	< 0.10 mm
Furniture leg	ISO 16581 - EN 424	Pass
Castor chair	ISO 4918 - EN 425	Pass
Curl resultant to heat	ISO 23999 - EN 434	≤ 2 mm
Impact sound reduction	EN ISO 717-2	ΔL _w = 6 dB
Thermal resistance	EN ISO 10456	approx. 0.05 m² K/W
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	EN ISO 26987 - EN 423	Resistance
Slip resistance	EN 13893 DIN 51130	μ ≥ 0.30 D5 R9
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10⁹ Ω
Colours		Granit: 4 - Concrete: 3

Technical data in force upon the date of publication (09/14). The values correspond to laboratory tests (no in situ test) and are subject to modification. Tarkett's instructions regarding installation, cleaning and maintenance shall be observed. Please contact your local sales rep. for these instructions.

CUSTOMS TARIFF: 48205000000F

Our Sustainability tag explains the content of our products and how they contribute to our sustainability strategy and human well-being.



The 2 formats are not interconnectable

■ **WESTERN EUROPE:** Austria: Tarkett Holding GmbH, Niederlassung Wien - Tel. +43 1 47 88 062 • Belgium: Tarkett France Belux - Tel. +32 16 35 98 80 • Denmark: Tarkett A/S - Tel. +45 43 90 60 11 • Finland: Tarkett Oy - Tel. +358 9 5406 5870 • France: Tarkett SAS - Tel. +33 1 41 20 42 49 • Germany: Tarkett Holding GmbH, Bereich Objekt - Tel. +49 62 33 810 • Greece: Tarkett Monoprosopi Ltd. - Tel. +30 210 6745 340 • Italy: Tarkett S.p.A. - Tel. +39 0744 7551 • Luxembourg: Tarkett GDL SA - Tel. +352 949 211 8804 • Netherlands: Tarkett Holding GmbH, Vestiging Nederland - Tel. +31 76 57 80 760 • Norway: Tarkett AS - Tel. +47 32 20 92 00 • Portugal: Tarkett SA - Tel. +351 21 427 64 20 • Spain: Tarkett Floors S.L. - Tel. +34 91 358 00 35 • Sweden: Tarkett Sverige AB - Tel. +46 771 25 19 00 • Switzerland: Tarkett Holding GmbH, Bereich Objekt Schweiz - Tel. +41 043 233 79 21 • Turkey: Tarkett Argen - Tel. +90 212 213 65 80 • United Kingdom: Tarkett Ltd. - Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE:** Baltic Countries: Tarkett Baltics - Tel. +370 37 262 220 • Czech Republic: Tarkett France SAS, org. slozka - Tel. +420-271 001 602 • Hungary: Tarkett France SAS - Tel. +36 1 437 8150 • Poland: Tarkett Polska Sp. z o.o. - Tel. +48 22 639 31 68 • Russian Federation: ZAO Tarkett RUS - Tel. +7 495 775 3737 • Slovakia: Tarkett France SAS, org. slozka - Tel. +421 248 291 317 • South East Europe: Tarkett Trade d.o.o. - Tel. +381 21 7557 649 (44) 569 12 21 • Ukraine: Tarkett UA - Tel. +38 (0) 44 569 12 21 ■ **ASIA AND OCEANIA:** Australia: Tarkett Australia Pty Ltd. - Tel. +61 2 88 53 12 00 • China: Tarkett Floor Covering (Shanghai) Co. Ltd. - Tel. +86 (21) 60 95 68 38 ext 841 • Hong Kong: Tarkett Asia Pacific Ltd. - Tel. +852 2511 8716 • India: Tarkett France (India Branch) - Tel. +91 11 4352 4073 • South East Asia: Tarkett Flooring Singapore Pte Ltd. - Tel. +65 6346 1585 ■ **AFRICA:** Tarkett International - Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East - Tel. +961 1 51 33634 • Israel: Tarkett International - Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA:** USA: Tarkett Inc. - Tel. +1 713 860 9811 / Johnsonite - Tel. +1 440 543 8916 • Canada: Tarkett Inc. - Tel. +1 450 293 173 ■ **LATIN AMERICA:** Brazil: Tarkett Fademac - Tel. 55 12 3954 7108 • Other countries: Tarkett America Latina - Tel. +55 11 3047 7200 • Argentina - Chile - Uruguay: Tarkett Latam Mercosur - Tel. 54 11 48 06 74 28 / 54 9 11 44 46 88 82 • Colombia - Panama - Caribbean: Tarkett Latam Andina - Tel. 57 1 759 5781 / 57 312 273 1566 • Bolivia - Ecuador - Paraguay - Peru: Tarkett Latam Sur Oeste - Tel. 55 11 3047 7233 • Mexico / Central America: Tarkett Latam Mexico - Tel. 52 735 35 63 918 / 52 55 51 07 9524




www.tarkett.com

Printed on 100% recycled paper and cardboard - ♻️ recyclable

TILT - 4697 3504 05 - 10/2014

Tarkett Interlocking Tiles

Connect your ideas to reality

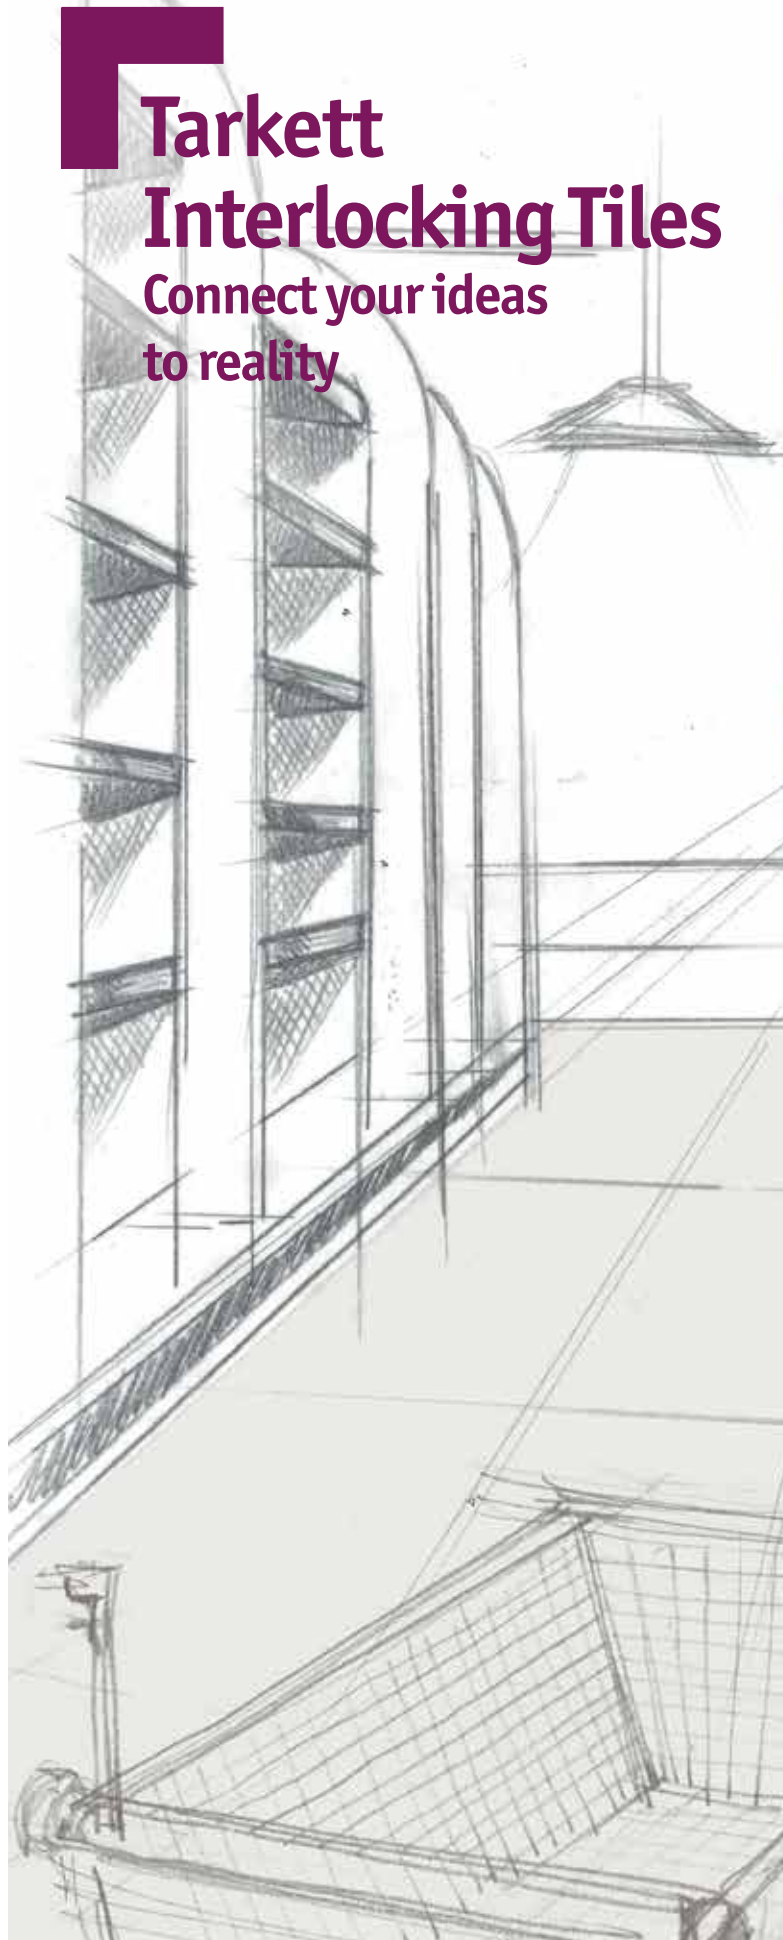

- > Quick and easy installation
- > High traffic resistance
- > Cost saving

LUXURY VINYL TILES



THE ULTIMATE FLOORING EXPERIENCE

TILT- Tarkett Interlocking Tiles


TILT is Tarkett’s floating floorcovering solution designed for commercial or industrial applications in both new builds and renovation projects. Easy to install, it keeps installation time to a minimum, and TILT also reduces business losses due to construction downtime. Good value for your money, TILT saves you time and is an invaluable cost-saver on any construction project.

Easy to install

- > Limited subfloor preparation = time saved: 20% quicker than glue-down products
- > No glue required = cost & time savings: 10% lower installation costs
- > Your floor immediately available for use = no loss of business: overnight installation



A solid construction

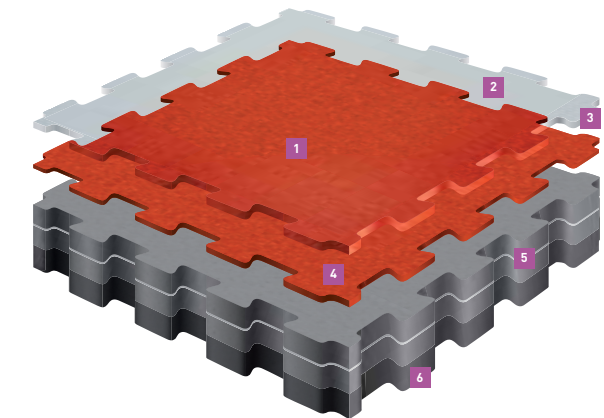

- 1

TopClean XP PUR reinforcement
extreme resistance and easy low cost maintenance
- 2

Surface embossing
for better non-slip properties
- 3

Pure PVC transparent wear layer
exceptionally hardwearing and indentation resistant
- 4

Design film
7 design options
- 5

Core layer with glass fiber reinforcement
excellent dimensional stability and resistance to tear and indentation
- 6

Balancing layer
for a curl-free product

Choose your format and your design



Concrete

With its high-end design, Concrete is the perfect solution for aesthetic needs in all commercial areas.


Its compact dimensions are an advantage for small and mid-sized surfaces.




- > 2 formats:
Concrete:
45,72 x 45,72
- Granite:
91,44 x 91,44
- > 2 different patterns:
Concrete & Granite
- > 7 smart colour choices

Granite

Specially designed for large surfaces, Granite is the ideal solution to mask dirt and dust in high traffic areas.

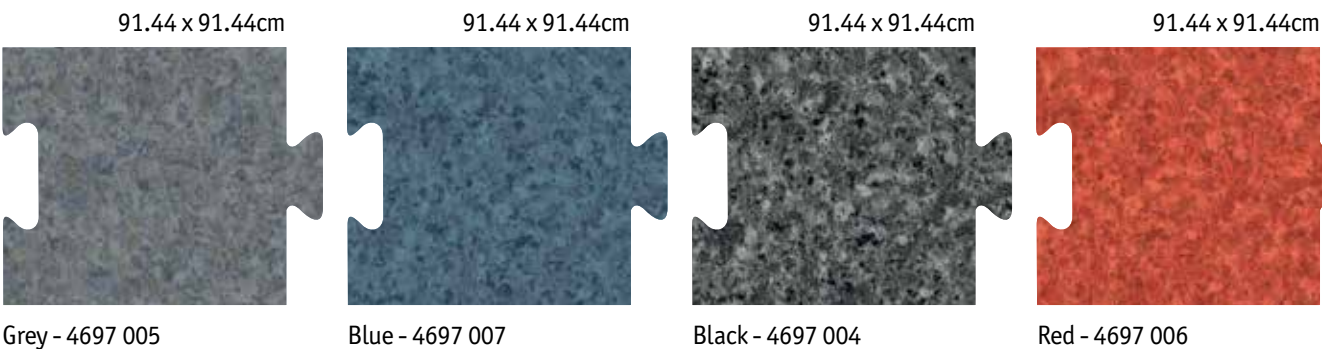


Ensure a perfect finish

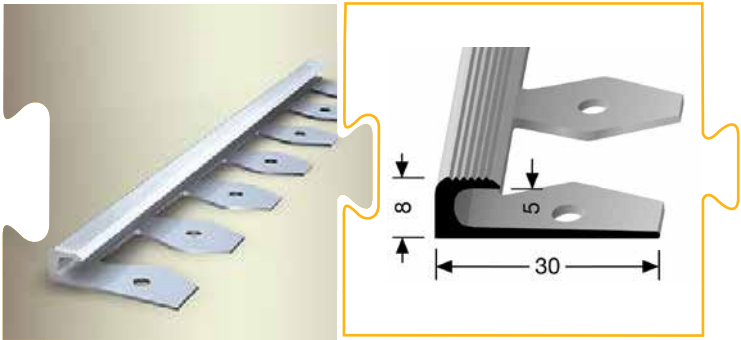

Flexible Aluminium Profile
Aluminium stop profile, to be screwed.
2 colours:

- Ref: silver 1456 011
- Ref: stainless steel 1456 012


Delivery Form: 10 units of 2,5 lm

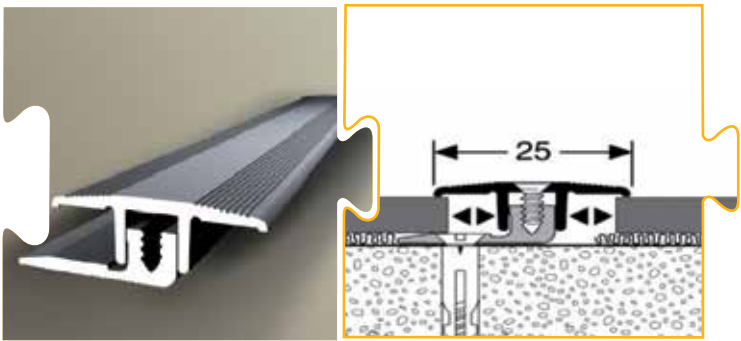

Stainless Steel Transition Profile
Aluminium transition profile, to be screwed.

- 2 colours:**
- Ref: silver 1451 011
- Ref: stainless steel 1451 012


Delivery Form: 10 units of 2,7 lm

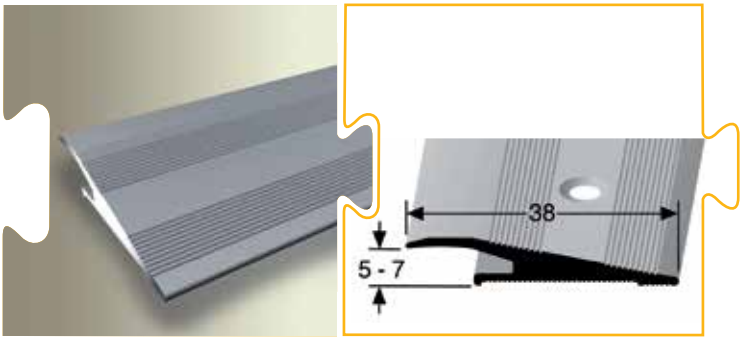

Aluminium Ramp Profile
Aluminium ramp profile, to be screwed.
2 colours:

- Ref: silver 1454 011
- Ref: stainless steel 1454 012

Delivery Form: 10 units of 2,7 lm

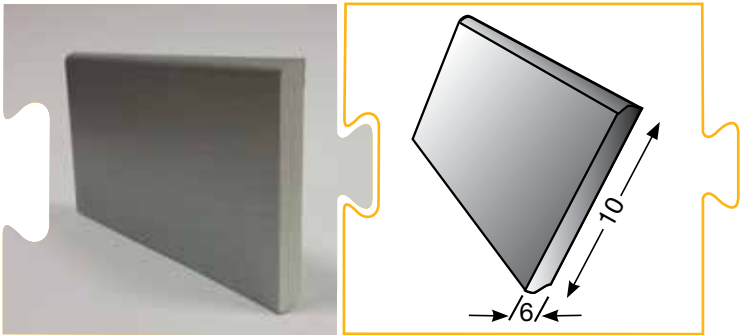

Wall Base Decorative Set on Skirting
Compact PVC skirting foreseen with decorative film and PUR treatment. To be glued.

- 2 colours:**
- Ref: white 2664 0500
- Ref: aluminium 2664 0501

Delivery Form: 16 units of 2,5 lm