

NERA FIRST PLUS

gerflor.com



Gerflor®
theflooringroup



NERA FIRST PLUS



HIGH TRAFFIC RESISTANCE

- › Heterogeneous multipurpose flooring recommended for hospitals, schools, offices and institutional buildings
- › Highly durable: Group T abrasion rating
- › Good resistance to indentation: ≤ 0.05 mm



EASY MAINTENANCE & HYGIENE

- › PUR treatment
- › Bacteriostatic and fungistatic Sanosol® treatment



ECO RESPONSIBLE

- › 100 % recyclable product
- › No heavy metals, no solvent based inks, no formaldehydes
- › No substance potentially subject to any REACH * restrictions

*REACH: European Union Regulation to prevent sale of proven harmful raw material



ACOUSTIC COMFORT

- › Sound insulation: approx **8dB**

Don't forget our complementary ranges!



Handrails



Wall Coverings
& Protections




Entrance mats




Skirtings & Profiles

NERA FIRST PLUS


 2 m	34-43	8dB	PUR	 100% recyclable
--	-------	-----	-----	---

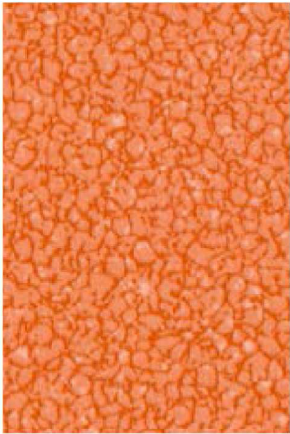


1501 Borgo Orange
WR: 0585 2464

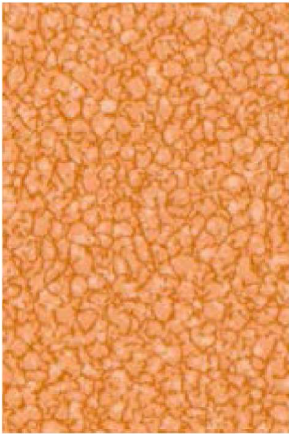


0053 Borgo Sienne
WR: 0585 0535

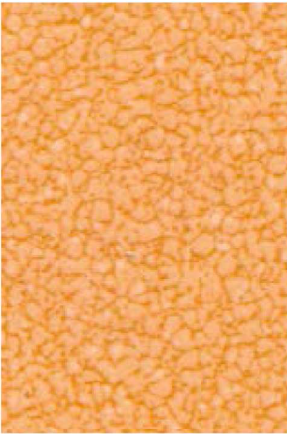

1502 Borgo Gold
WR: 0585 2461

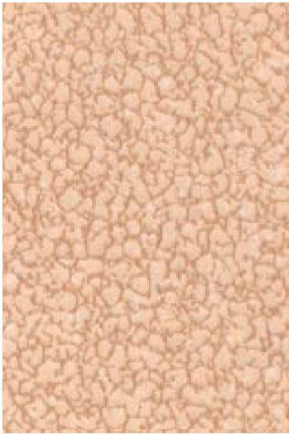


0114 Borgo Sahara
WR: 0585 0316

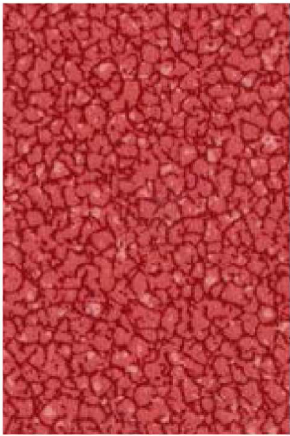

1503 Borgo Red
WR: 0585 2462




0052 Borgo Noir
WR: 0585 0534

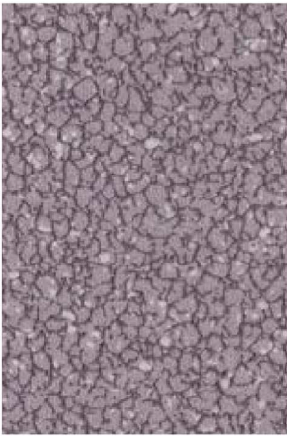


0051 Borgo Gris
WR: 0585 0120




1508 Borgo Pearl
WR: 0585 2470

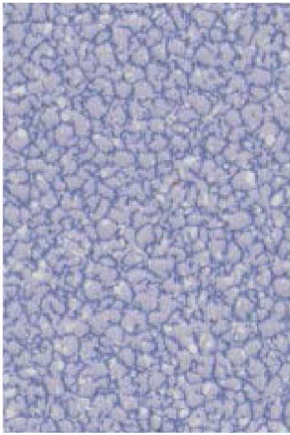


0054 Borgo Azur
WR: 0585 0536

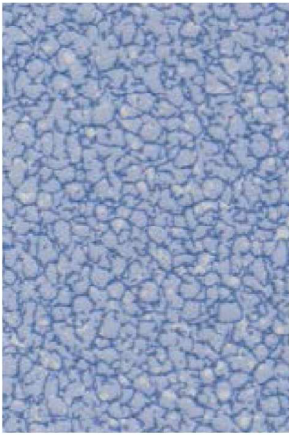


1500 Borgo Ocean
WR: 0585 2463

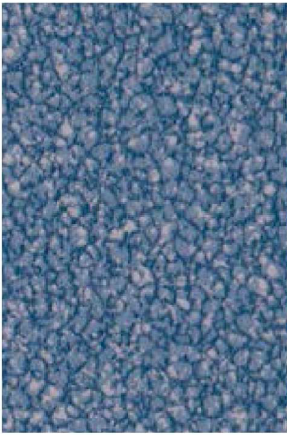


0055 Borgo Bleu
WR: 0585 0537

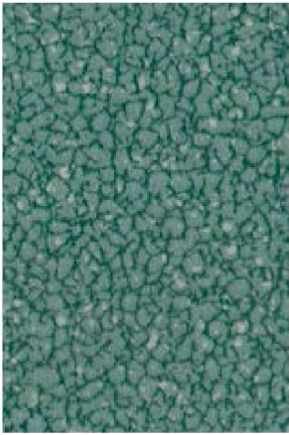


1504 Borgo Forest
WR: 0585 2468

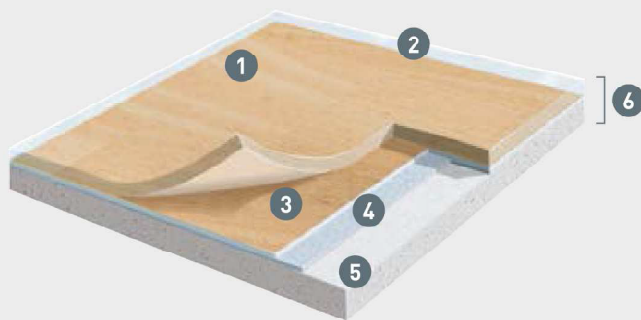

- 1 PUR treatment
- 2 Transparent wear layer
- 3 Printed design
- 4 Glass fiber
- 5 Compact backing
- 6 Sanosol® treatment

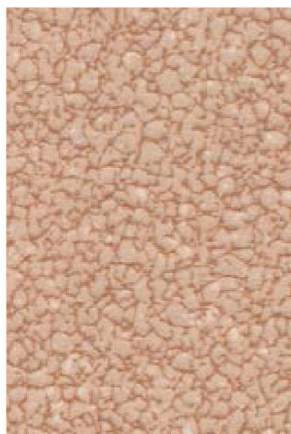

1506 Borgo Sand
WR: 0585 2465

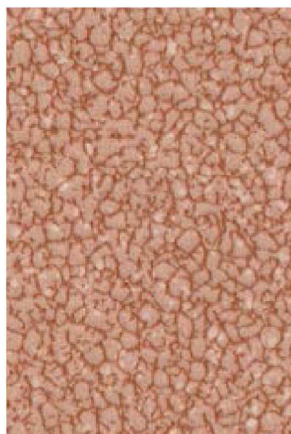

1507 Borgo Brown
WR: 0585 2471




0584 Cadix Brown
WR: 0585 0657




0411 Beech Natural
WR: 0585 0039




0668 Chene Classique
WR: 0585 2134

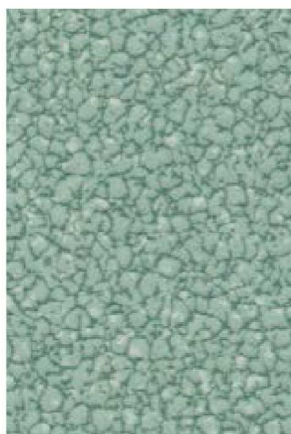


1505 Borgo Green
WR: 0585 2467

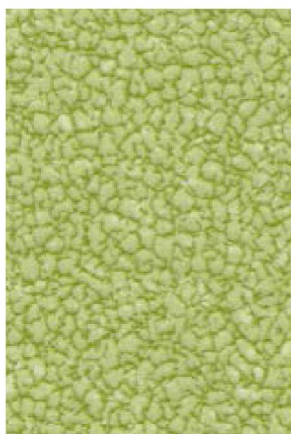

1509 Borgo Anise
WR: 0585 2469

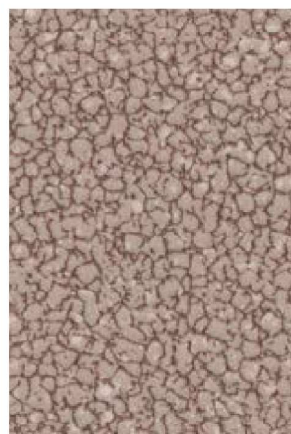

1510 Borgo Taupe
WR: 0585 2466

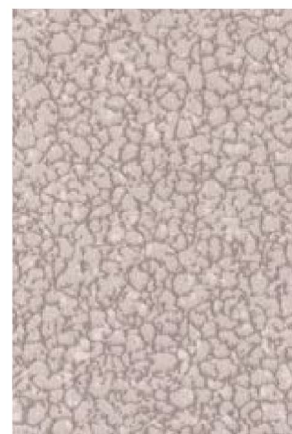

0115 Borgo Fumee
WR: 0585 0817

NERA FIRST PLUS

It is a multilayered vinyl floorcovering, available in 2m wide sheets. The product comprises a compacted underlayer reinforced with glass fiber and a printed design that is protected by a transparent wearlayer. **NERA FIRST PLUS** is PUR treated that facilitates ease of maintenance. It is **SANOSOL®** treated in its entire thickness to prevent bacterial and fungal growth.

Installation:

Installing is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's technical Department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18° to 24°C. All seams must be heat welded using Gerflor matching weld rod.

Maintenance:

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using neutral cleanser. More intense cleaning should be carried out with a machine fitted with blue or red pad using a spray detergent or floor maintainer. Further maintenance instructions are available upon request.



Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

Further installation and maintenance instructions are available from Gerflor.

Nera First Plus

DESCRIPTION

Total thickness	EN 428	mm	2.10
Thickness of wearlayer	EN 429	mm	0.70
Weight	EN 430	g/m ²	2250
Width of sheet	EN 426	cm	200
Length of sheet	EN 426	lm	Approx 20

CLASSIFICATION

Norm / Product specification	-	-	EN 649
European classification	EN 685	class	34-43
Fire rating	EN 13 501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	<2
Slip resistance wet : ramp test with oil	DIN 51 130	class	R9

PERFORMANCE

Wear resistance	EN 660.2	mm ³	≤2.0
Wear group	EN 653	-	T
Dimensional stability	EN 434	%	≤0.40
Residual indentation	EN 433	mm	≤0.05
Impact sound insulation	EN ISO 717-2	dB	8
Thermal conductivity	EN 12 524	W/(m.K)	0.25
Colour fastness	EN 20 105 - B02	degree	≥6
Chemical products resistance	EN 423	-	Good
Bacteriostatic and fungistatic treatment	-	-	Sanosol®
Surface treatment	-	-	PUR

CE MARKING

CE	EN 14041	-	   
----	----------	---	---



Gerflor Be CONNECTED!



www.gerflor.com



Committed to sustainable development

Gerflor
theflooringgroup